

Take Apart Cradle

This cradle can be assembled and taken apart with four screws. The pattern is designed for 3/8" wood (the pattern may be adjusted for other thicknesses of woods by adjusting the outside lines of the slotted areas and for length by changing the right side of the 1/2 rail pattern).

Endboards (Head & Foot)

2-3/8 X 8 X 10" Stack Cut

1. Cut out the endboards. Drill 3/4" holes where indicated. Connected the holes with a line and cut out to form the cradle handles.
2. Rout/sand the outside of the boards and cradle handles (do not do the areas where the rails attach).
3. Draw a line from the lower portion of the cradle slots for the bed support. Glue/nail a 3/8" X 5 1/2" bed support in the center of the inside each endboard.

Cradle Rails

2- 3/8 X 16 X 2" Stack Cut

1. Cut out the rail using the 1/2 pattern (length of pattern may be adjusted)
2. Drill a countersunk hole where indicated for assembly (this may be done at the end to make sure it meets the end boards.)
3. Rout or sand the outside (do not do the slotted area)

Cradle Bed

1-5/16 X 6 1/4 X 13"


1. Cut bed board (may use 1/4 or 3/8" board as alternative)
2. If bed is to be removable drill a 1" hole in the center of the board 1" from the end

Assembly

1. Slide the end rails over the end boards
2. Screw the end rails to the end boards
3. Bed may be glued in if desired.



Take Apart Cradle

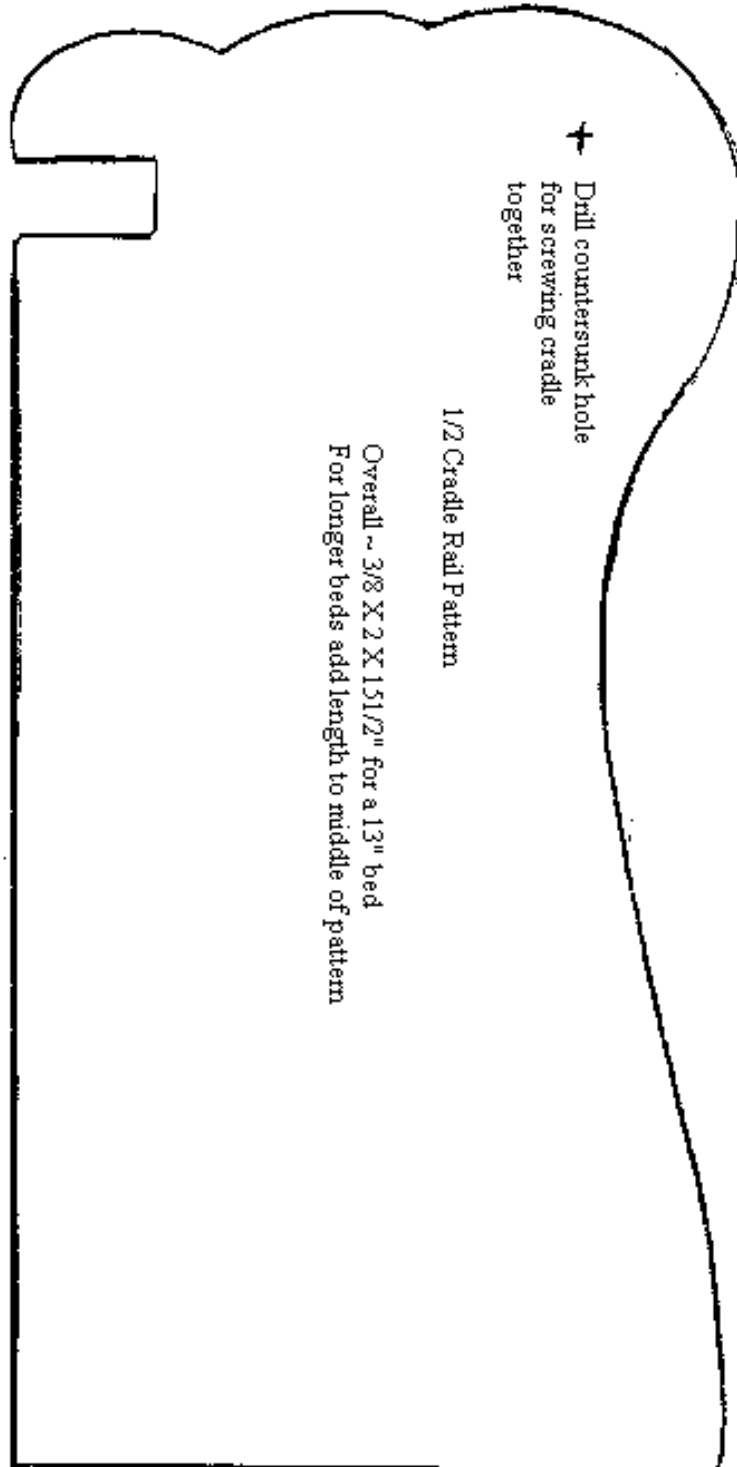

Take Apart Cradle

